



C7



C8

Canopy Series CEILING MOUNT

PERFORMANCE:

Model	Watt	Lumen	Efficacy
C7	36W	4950 lm	136 lm/watt
C8	53W	7250 lm	136 lm/watt

SPECIFICATION:

Input voltage: 120-277VAC


LED: Seoul Semi or equivalent

Color Temp: 4000K


Construction: Powder coated die-cast aluminum body with UV stabilized acrylic prismatic refractor

Mounting: 3/4" conduit entry on top and 1/2" conduit entries on three sides

Surge Protection Device: 2KV

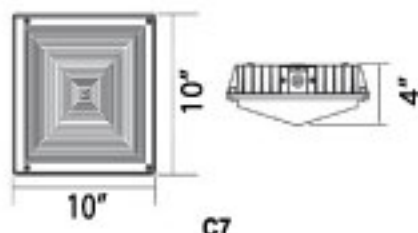

C7

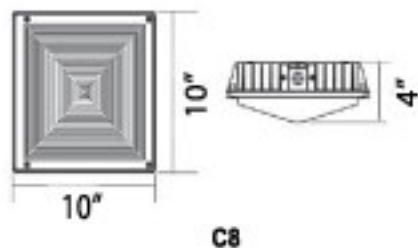

C8



Ascent Technologies
5625 S. Arville St. Suite A.
Las Vegas, NV 89118
www.ascent-technologies.com
ContactMail@ascent-technologies.com

