


FlexPack™ LUMOS Series LED Wall Pack Luminaire



LUMOS-9L w/Motion Sensor
Forward Throw Orientation

One Light Fixture - Multiple Applications



Full Cut-Off Applications:

Baseplate is positioned with large side up. Glass is parallel with the ground.

Lens is directed down and forward with zero light emitted above the horizon.

OR



Forward Throw Applications:

Baseplate is positioned with large side down. Lens is tilted back to project light farther forward.

Product Highlights

- Patented FlexPack™ Design
- LED optics provide uniform light pattern with minimal glare
- 2 Different housing sizes available for wide variety of applications
- Available with factory installed motion sensor
- 0-10V Dimming capable
- Impact resistant and tamper resistant polycarbonate lens
- 10 Year warranty

Jarvis SAR2-HV Series

Converts between a forward throw and a dark sky wall pack

Housing designed with space for factory installed motion sensor

Can be changed after install between forward throw and dark sky light throw

UV-resistant powdercoat finish avoids fading and flaking

Competitors' Products

Cannot work as both applications

Motion sensor requires special mounting bracket or drilling which can compromise housing seal

Cannot be changed - light fixtures must be replaced if light throw requirement is altered

Powdercoat may fade or flake

Ordering Guide *Example: LUMOS-4L-40K-UV-BRZ-DM*

| Product Family | Lumen Output | CCT | Voltage | Housing Color | Dimming/Control | Factory Installed Accessories |
|--|---------------------|-------------|---------------|-----------------------------|---------------------|--|
| LUMOS Compact Flexpack™ Bronze LED Wall Pack | 5L - 5,952 Lumens | 40K - 4000K | UV - 120-277V | BRZ - Bronze WHT - White | DIM - 0-10V Dimming | +A299 - 120-277V Button Photocell |
| | 9L - 9,672 Lumens | 50K - 5000K | | | | +A300 - 120V Button Photocell |
| | 11L - 11,808 Lumens | | | | | + Jarvis Link WCM - Bluetooth Wireless Control Module* + Jarvis Link Sensor (8-30ft) - Bluetooth Wireless PIR Sensor** +A311 - Programmable PhotoMotion™ PIR Motion Sensor** |

Variants in blue are typically quick ship items. Other variants are typically special order with longer lead time.

* Jarvis Link System Requires Prior Training With Jarvis Representative

** Requires A315 remote control for custom programming

Additional Field Installed Accessories

| Catalog # | Description |
|-----------|--|
| A301 | Heavy Duty Stem Photocell 120-277V |
| A312P | Knockout Arm Mount PIR PhotoMotion™ Sensor - Bronze* |
| A313P | Knockout Arm Mount PIR PhotoMotion™ Sensor - White* |

* Requires A315 remote control for custom programming

Electrical

Input Voltage: 120-277V 50/60Hz

Power Factor: >.9 at full load

Total Harmonic Distortion: <20% full load

Includes over voltage protection, over current protection, and short circuit protection

Operating Temperature Range: -35°C to 40° C Ambient (-31°F to 104°F)

Controls and Dimming

0-10V Dimming is standard for LUMOS series. Dimming leads are accessible inside the fixture.

The LUMOS series is compatible with both Jarvis Lighting's PhotoMotion™ PIR sensors and network lighting control system. The network lighting control system allows the lights to communicate with each other via Bluetooth® signal. Systems are typically capable of grouping, controlling and dimming lights through a number of methods including motion sensors, photo sensors, schedules, manual Bluetooth switches and more. PhotoMotion™ sensors provide multi-level control based on both motion and/or ambient natural lighting levels and can be custom programmed via remote control.

The LUMOS series is compatible with most controls including motion sensors and photosensors. Motion sensors and photosensors can be mounted into knockouts on sides of housing. Contact Jarvis Representative for further information.

Most Popular Models and Specifications:

| Model | DLC Product ID | Input | Lumens | Wattage | CCT | CRI | PF |
|-------------------------------|----------------|------------------|-----------|---------|-------|------|-------|
| LUMOS-5L-40K-UV-[BRZ,WHT]-DM | PLTB32MTTOIW | 120-277V 50/60Hz | 5,808 lm | 48W | 4000K | ≥ 70 | ≥ 0.9 |
| LUMOS-5L-50K-UV-[BRZ,WHT]-DM | PLB7JF2ZOH1L | 120-277V 50/60Hz | 5,952 lm | 48W | 5000K | ≥ 70 | ≥ 0.9 |
| LUMOS-9L-40K-UV-[BRZ,WHT]-DM | PLEEK5315EC8 | 120-277V 50/60Hz | 9,516 lm | 78W | 4000K | ≥ 70 | ≥ 0.9 |
| LUMOS-9L-50K-UV-[BRZ,WHT]-DM | PLC5ASBRUJ5X | 120-277V 50/60Hz | 9,672 lm | 78W | 5000K | ≥ 70 | ≥ 0.9 |
| LUMOS-11L-40K-UV-[BRZ,WHT]-DM | PLD2ZUD3R2UA | 120-277V 50/60Hz | 11,616 lm | 96W | 4000K | ≥ 70 | ≥ 0.9 |
| LUMOS-11L-50K-UV-[BRZ,WHT]-DM | PLRWJJX1PGIA | 120-277V 50/60Hz | 11,808 lm | 96W | 5000K | ≥ 70 | ≥ 0.9 |



*LUMOS-11L Side View
Forward Throw Orientation*

*LUMOS-11L Side View
Dark SKY Orientation*



Construction and Materials

Die-cast aluminum housing cast from 383 (ADC12) alloy.

Patented design integrates LED optics and fixture mechanicals into a single structure that acts as both the heat sink and the fixture housing, resulting in increased thermal continuity and decreased componentry.

Front portion of housing can be installed onto baseplate of fixture in two positions.

Housing sections feature cast-in hooks and sections connect via hooks and fasteners. Each cast-in hook functions as a threaded receptacle when mounted in the opposite orientation.

Die-cast housing features a powdercoat finish with UV protection to ensure longevity of color. Powdercoat finish is applied directly to aluminum housing and will not crack or peel. Default color is bronze. Custom colors are available. Contact factory for additional color information.

LEDs are reflow soldered to a metal core circuit board, providing greater thermal transfer than standard circuit board materials. The LED board is mechanically fastened directly to die-cast housing.

Lens construction is a polycarbonate lens with forward and wide throw optics.

Luminaire's construction contains zero mercury.

Fasteners are stainless-steel and will not rust or create rust-streaks.



Regulatory and Voluntary Qualifications

ETL listed to UL1598 and UL8750 for both US and Canada.

State of California Title 24 Compliant when installed in accordance with local requirements.

DesignLights Consortium® (DLC) Premium qualified product.

Not all versions of this product may be DLC qualified.

Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Fixture Protection Class IP64.

Rated for Wet Locations.



LUMOS-5L
Dark Sky Orientation



Warranty and Lifetime

LUMOS Series carries a 10-year limited warranty. Contact Jarvis representative for details.

Projected LED lifetime exceeds 50,000 hours under most operating conditions. Lifetime projections are calculated using data including LM-79, LM-80 and TM-21 calculations. Contact Jarvis representative for details.



Installation

Luminaire installs onto wall by mounting the luminaire's baseplate to the wall. Wall materials and mounting conditions vary by structure and project – contact factory for suggesting which fasteners are optimal. Baseplate should be mounted with larger side on top to install luminaire in the full cut-off orientation or with the larger side on the bottom to install luminaire in the forward-throw orientation. Electrical connections can be brought into the luminaire either through threaded 1/2" NPT knock-outs (located on the sides, top and bottom of the fixture's baseplate) or by mounting the luminaire over a recessed junction box. Front section of luminaire contains LEDs and optics, while the rear section contains the power supply. Front section connects to rear section via cast-in hooks and fasteners. Installation conditions often require sealing of fixture penetrations created during installation.

Contact a Jarvis Representative for full installation instructions, videos or additional information.

Mounting Height Recommendations

| Model | Dark-Sky Orientation | Forward-Throw Orientation |
|-----------|-----------------------|---------------------------|
| LUMOS-4L | 8 to 12' from ground | 10 to 12' from ground |
| LUMOS-5L | 8 to 14' from ground | 12 to 14' from ground |
| LUMOS-9L | 10 to 15' from ground | 12 to 15' from ground |
| LUMOS-11L | 10 to 20' from ground | 12 to 18' from ground |

Retrofit Applications

The LUMOS Series is designed to easily install when replacing existing HID or other fixtures. Conduit entrance locations on the LUMOS series line up with many common existing wall packs.

Contact a Jarvis representative for more info and for advice regarding specific applications.

Photometrics

Photometric information, including LM-79 reports and .IES files are available for most models at www.jarvislighting.com. Site photometrics and lighting layouts are available. Contact a Jarvis representative.





Product Weight:

| Model # | Net Weight |
|----------------------|------------|
| LUMOS-4L / LUMOS-5L | 5.9 lbs |
| LUMOS-9L / LUMOS-11L | 7.7lbs |



Dimensions:

LUMOS-4L/5L

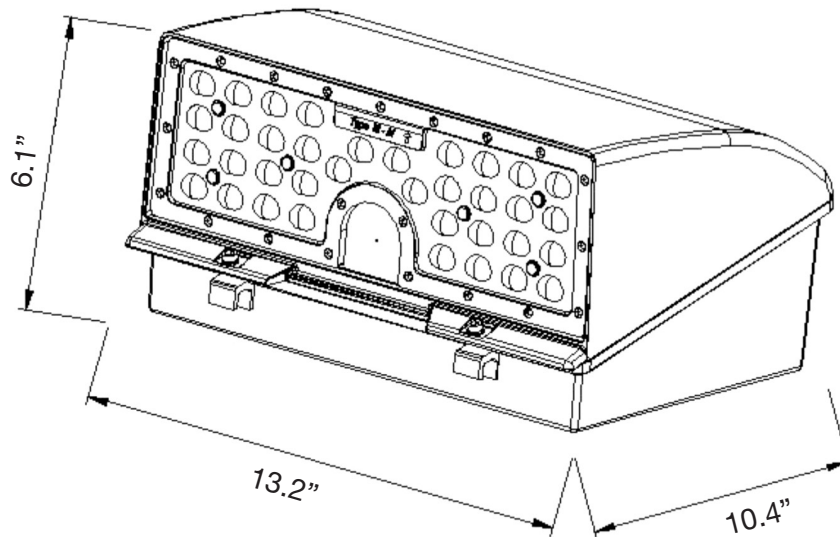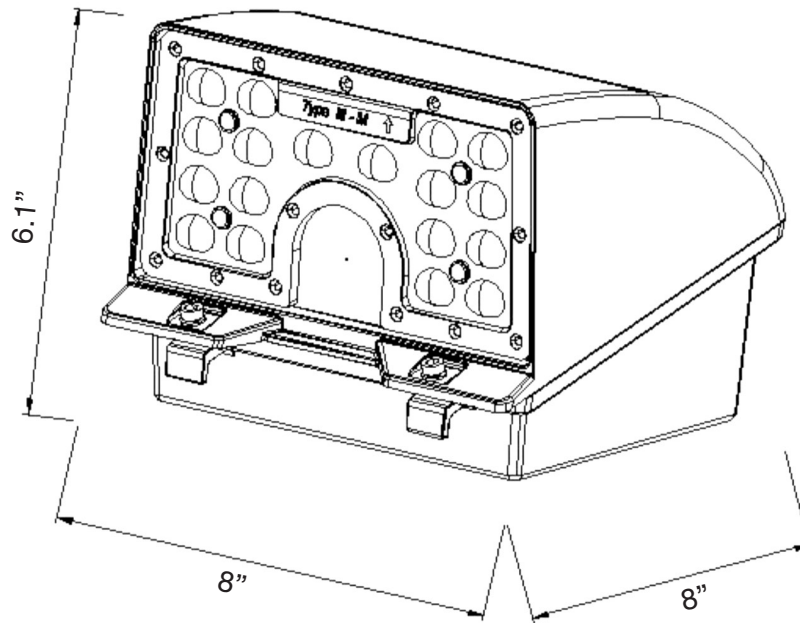

LUMOS-9L/11L



BRIGHT DONE RIGHT™

