

# LumaView

LED WALL PACK



**22W**  
WATTAGE



**3,000 lm**  
LUMENS



**4000K**  
COLOR TEMP




**MULTI-VOLT**  
120-277V



## SPECIFICATIONS

Model	LV-WP24-40K-MV
Wattage	22W
Lumens	3,000 lm
Color Temperature	4000K (Neutral White)
Voltage	120-277V AC
Frequency	50/60Hz
Efficacy	136 lm/W
CRI	≥80
Beam Angle	110°
Dimming	0-10V Dimmable
Power Factor	≥0.9
THD	<20%
Surge Protection	4KV
Operating Temperature	-40°F to 113°F (-40°C to 45°C)
Housing Material	Die-Cast Aluminum
Housing Color	Bronze
Lens Material	Polycarbonate
IP Rating	IP65 Wet Location Rated
Impact Rating	IK08
Mounting	Wall Mount
Weight	4.8 lbs (2.2 kg)
Lifespan	50,000+ Hours
Warranty	5 Year Limited Warranty
Certifications	UL Listed, DLC Listed
Applications	Building Exteriors, Entryways, Walkways, Garages, Loading Docks, Schools, Commercial Facilities

## DIMENSIONS

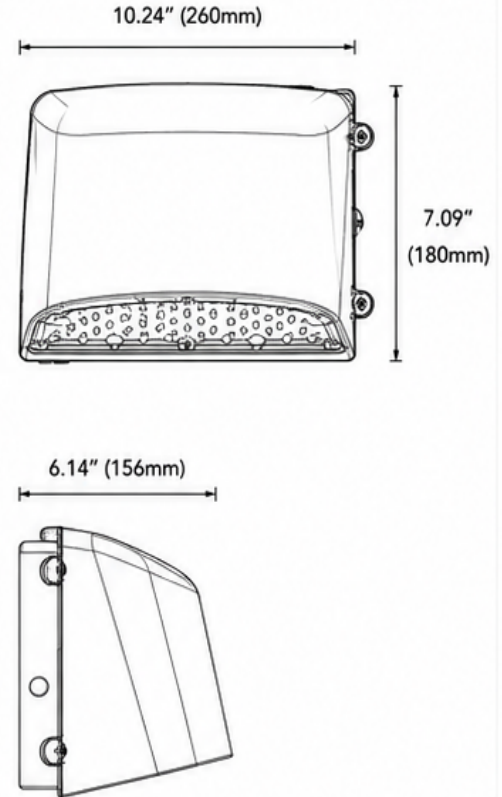

## LV-WP24-40K-MV

22W LED WALL PACK  
MULTI-VOLT (120-277V)


The LumaView LV-WP24-40K-MV LED Wall Pack delivers reliable, energy-efficient illumination ideal for building exteriors, entryways, garages, and perimeter lighting. With a durable die-cast aluminum housing and modern low-profile design, this fixture provides long-lasting performance in any environment.

### KEY FEATURES & BENEFITS

- BRIGHT, ENERGY-EFFICIENT LIGHTING**  
Delivers high-performance illumination using 22W of power for maximum visibility.
- DURABLE CONSTRUCTION**  
Die-cast aluminum housing with a powder-coat finish for superior durability and weather resistance.
- BUILT TO PERFORM**  
Engineered to withstand harsh conditions with an IP65 wet location rating.
- MODERN, LOW-PROFILE DESIGN**  
Sleek and compact design blends seamlessly with any exterior architecture.
- EASY INSTALLATION**  
Multiple mounting points and a built-in knockout for quick and secure installation.
- VERSATILE APPLICATIONS**  
Ideal for building exteriors, walkways, loading docks, garages, schools, and commercial facilities.

## PHOTOMETRICS

### Illuminance at a Distance

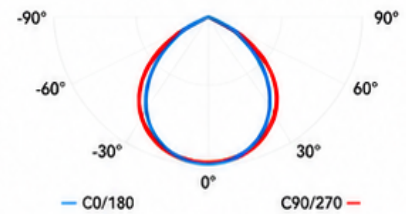

Distance	Center Beam (lx)	Beam Width (ft)
10 ft	33.3 lx	26.0 ft
20 ft	8.3 lx	52.0 ft
30 ft	3.7 lx	78.0 ft
40 ft	2.1 lx	104.0 ft
50 ft	1.3 lx	130.1 ft

Beam Angle: 110°

### IDEAL APPLICATIONS



### CERTIFICATIONS



### BUILT TO PERFORM. BUILT TO LAST.

The LumaView LV-WP24-40K-MV LED Wall Pack is engineered for reliability, efficiency, and long-term performance in any outdoor environment.

